


NETCO EXTRUDED PLASTICS

... where customers come first



CONSTRUCTION

Netco Extruded Plastics supplies many products to the construction market including tubing and beaded piping, packaging strips for facilitating the automated delivery of tapped hole inserts, gasketing and sealing extrusions for windows and doors, and more. Our ability to deliver continuous extrusions and profiles or individually fabricated parts and assemblies helps us to best meet the needs of our construction customers.

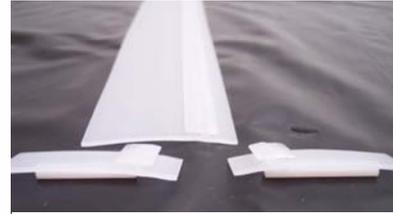

Office Furniture Border Strips



Wire Staple Guards



OD/ID Pipes

Netco provides a wide range of rigid and flexible tubing for a variety of construction applications. PVC and polyethylene tubing is used for water and air flow piping, while our high visibility orange PVC tubes are used for heavy equipment safety markers. These tubes range from .025" to 3" in diameter, depending on wall thickness. We extrude thermoplastic staple insulation carrier profiles, which allow for easy loading and ejection of staples and fasteners. For general gasketing and sealing requirements, we can easily extrude rigid or flexible materials in clear, white, black and custom colors for applications in windows and doors among others.



With years of experience and knowledge in the plastic extrusion industry and 8 production extruders, Netco Extruded Plastics is well equipped to manufacture the low volumes needed for custom applications or the high volumes needed for more commodity construction applications. From simple shapes to complex profiles in a variety of plastic materials, we are committed to providing products of superior quality, delivered on-time, with world class customer service. Whatever your need, you can be confident that Netco extrudes quality.

PHYSICAL PROPERTIES							
General Properties Range	Density g/cc	Tensile str. @ yield 1000psi	Elongation at yield %	Flex. Mod 10E5 psi	Notched Izod Impact	Deflection Temp. F.	UL 94 Rating
ABS	1.05	4.5-8	30%	2.8-3.9	1.50-7.1	165-220	HB-V0
CAB (Cellulose Acetate, Butyrate)	1.2	3-6.6	-	1.2-2.7	2.2-8.4	205-154	-
LDPE (Low Density Polyethylene)	0.92	1.1-2.0	100%-800%	.2-4	No break	195-205**	-
HDPE (High Density Polyethylene)	0.95	3.0-5.0	60%-1000%	1.65-2.25	2.3-14.0	150-172	-
Polypropylene: HO	0.9	3.4-5.8	9%-15%	2.0-3.2	.4-.9	175-275	V0, V2, HB
Polypropylene: CO	0.9	2.4-4.0	8%-15%	.75-1.85	.8-3.0	145-160	V0, V2, HB
PVC (Flexible)	0.9	3.0-4.6	-	1.0-1.7	No break	194-203	
PVC (Rigid)	1.4	5.3-8.0	-	2.5-4.3	1.0-23.0	150-170	V0
Polystyrene	1.04	5.4-8	2%	3.0-5.0	.26-.4	203	HB
Polystyrene (High Impact)	1.05	2.7-4.3	5%-50%	2.0-3.4	.9-4.0	183-201	HB
Elastomers (TPE)	.94-1.2	0.5-3.0	200%-800%	-	NB	-	HB



NETCO EXTRUDED PLASTICS, INC.
 30 TOWER STREET
 HUDSON, MA
 TEL: 1 (877) 638-2621
 INFO@NETCOPLASTICS.COM
 WWW.NETCOPLASTICS.COM